


## Procedure for downloading the Firmware into the CX400


1. Connect the Printer to the PC using a parallel cable
2. Switch on the Printer
3. Open the Firmware Vx.xx folder and double click on the **CX400dl.bat** file.

The following screen will be displayed.

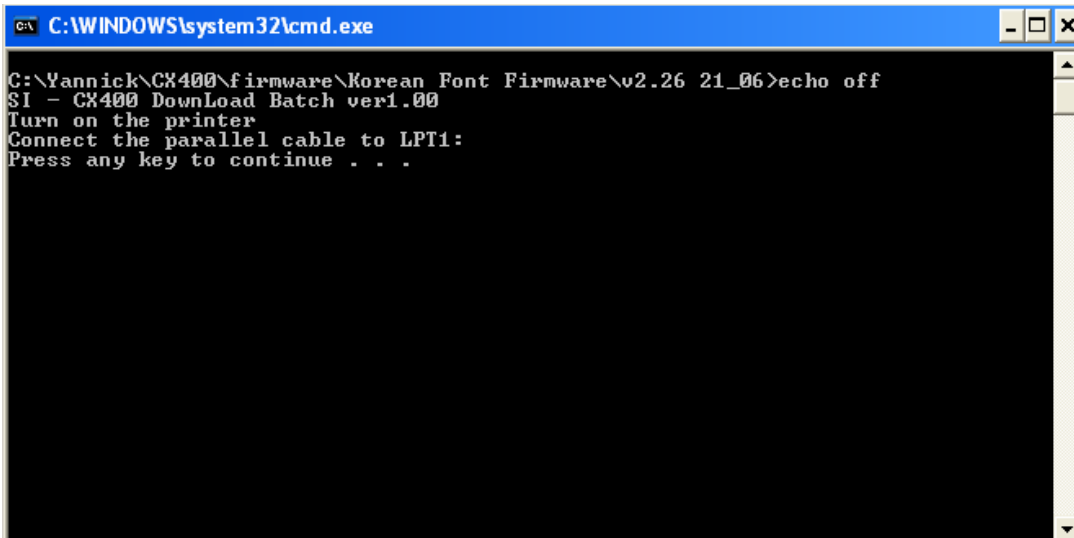

```
C:\WINDOWS\system32\cmd.exe
C:\Yannick\CX400\firmware\Korean Font Firmware\v2.26 21_06>echo off
SI - CX400 Download Batch ver1.00
Turn on the printer
Connect the parallel cable to LPT1:
Press any key to continue . . .
```

4. Press any key to continue. The firmware will be uploaded to the printer.
5. After the upgrade is complete, the following screen will be displayed.

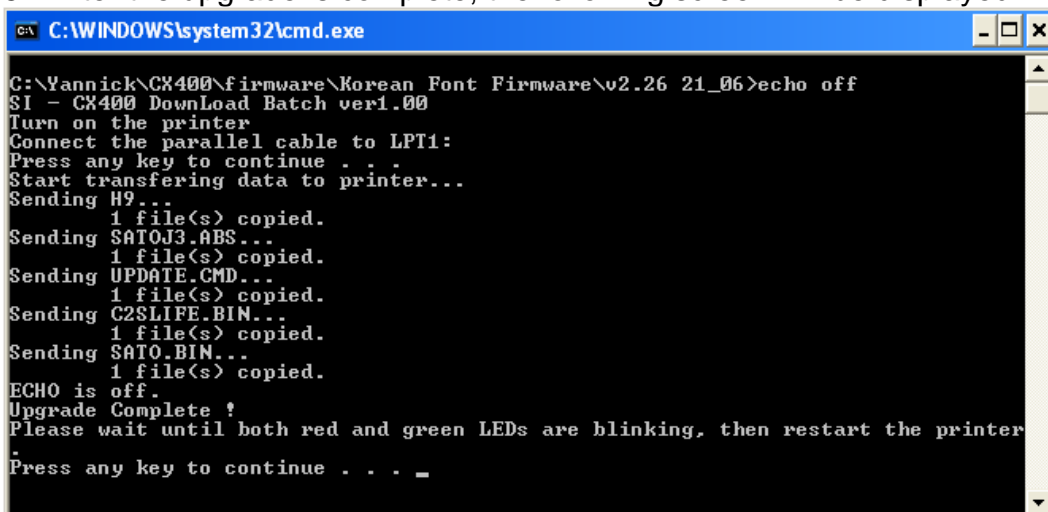

```
C:\WINDOWS\system32\cmd.exe
C:\Yannick\CX400\firmware\Korean Font Firmware\v2.26 21_06>echo off
SI - CX400 Download Batch ver1.00
Turn on the printer
Connect the parallel cable to LPT1:
Press any key to continue . . .
Start transferring data to printer...
Sending H9...
  1 file(s) copied.
Sending SATOJ3.ABS...
  1 file(s) copied.
Sending UPDATE.CMD...
  1 file(s) copied.
Sending C2SLIFE.BIN...
  1 file(s) copied.
Sending SATO.BIN...
  1 file(s) copied.
ECHO is off.
Upgrade Complete !
Please wait until both red and green LEDs are blinking, then restart the printer
Press any key to continue . . . _
```

6. Wait until both the red and the green LEDs on the printer are blinking.
7. Restart the printer to apply the changes.
8. Perform a test print to confirm that the firmware has been successfully updated.